

light Dome II


Product Manual

English


Thank you for purchasing aputure Light Dome II.

Aputure's Light Dome II is for the light storm C120, 300D and other LED light which with Industrial mount.


Material list

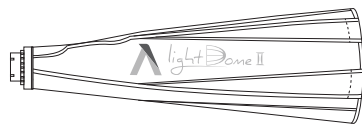


Softbox




Eggcrate



Outside Diffuser 1



Outside Diffuser 2



Inside Diffuser



Gel holder




Bag





Product Manual

Detailed product manual for Light Dome can be found on the movie solution page on www.aputure.com.

Light Dome II Setup



Light Dome II unlock

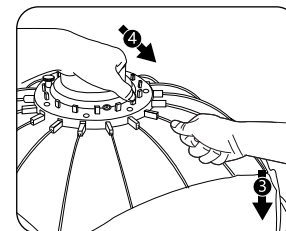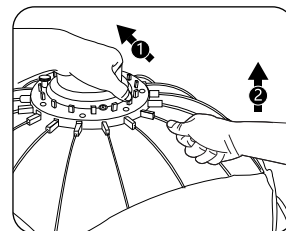


***Caution:** When using color gels with powerful LED lights, such as the Aputure C300D, the heat will cause the filter gels to distort or burnt after a period of time. You are advised to change new sheets of color filters once every 3 hours during constant usage; You are recommended to use ROSCO or LEE for better results.

Specifications

Item	Dimension	Net Weight
Softbox unfolded	Φ890x65mm (35x25.6")	2.55 kg (5.59 lb)
Outside Diffuser	Φ 885 mm (34.8")	
Inside Diffuser	Φ 235 mm (9.3")	
Eggcrate	Φ 885 mm (34.8")	
Gel holder	Φ185x65 mm (7.3x2.6")	

折页方式：



为折线(不印刷)

折页成型 (英文在正面) :



Aputure® 深圳市爱图仕影像器材有限公司			
设计项目	122 柔光箱说明书	图号	AP-122-PIB-01
尺寸(mm)	270*140mm 折页尺寸: 90*140mm	版本	V1.0
材质工艺	70g 书纸, 正反两面印刷	设计师	Disk
备注	料号: S12200050001	日期	20180810


使用者指南

中文


感谢您购买爱图仕“光风暴”多用途抛物线反光罩二代。

爱图仕·光风暴多用途抛物线反光罩二代是一款搭配爱图仕品牌光·风暴LS C120, 300D 摄影灯, 并兼容其他标准工业卡口的摄影灯。


物品清单

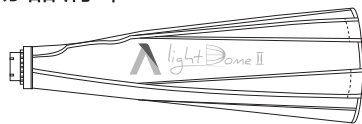


柔光箱



格栅



外部柔光布1



外部柔光布2



内部柔光布



色纸夹




手提包





使用者指南

您可以在本公司网站 <http://www.aputure.com/cn> 下载本产品的详细使用者指南。

安装



拆卸

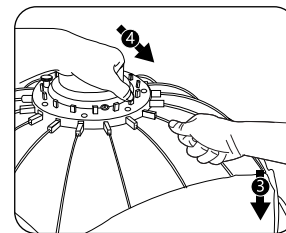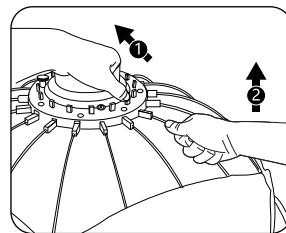

注意: 在给大功率灯加色纸的时候, 尤其是LS C300D, 经过一段时间使用, 热量会使色纸退色, 建议用户在持续使用时, 每3小时更换一次色纸。为了达到更好的校色效果, 建议用户使用Rosco或者Lee的专用色纸。

规格参数

物料	尺寸	净重
柔光箱打开状态	Φ890x65mm (35x25.6")	2.55 kg (5.59 lb)
外部柔光布	Φ 885 mm (34.8")	
内部柔光布	Φ 235 mm (9.3")	
格栅	Φ 885 mm (34.8")	
色纸夹	Φ185x65 mm (7.3x2.6")	