



# ProMediaGear®

16555 108th Ave. • Orland Park, IL 60467 USA  
1.888.413.3332 • 708.263.4443



## #BBGv2, Boomerang Flash Bracket

### Specifications:


Height.....	10 inches (254mm)
Width.....	7 inches (177.8mm)
Weight.....	18 ounces
Flash Bracket Rotation.....	90° degrees

# Instructions



1. Mount the #PBX3 Universal Bracket Plate or custom plate (F) to your camera body using the captive 1/4-20 screw with the supplied 5/32 hex wrench.
2. Attach the Boomerang Flash Bracket to the #PBX3 Universal Bracket Plate or custom plate by aligning the hardened steel guide pins on the Boomerang Bottom Arc portion with the mating holes on the Bracket Plate. Next, tighten the Quick Release Thumb Screw (G) until both parts are tight and flush.
3. To connect or remove the Boomerang Flash Arm from the Arc Base loosen the knob on the clamp mounted to the Arc (H). Slide the Flash Arm into the clamp. Tighten the spring clamp. Rotate the arm in the clamp for storage.
4. Mount your flash cord or cold shoe to the Flash Mount (A) and mount your flash.
5. To rotate the flash, we recommend using your left hand and reach across the lens to squeeze the Locking Lever (B). This will allow you to rotate the arm 90° degrees while holding your camera securely in your right hand.

## Side Distance Adjustment and Fold Down Mechanism

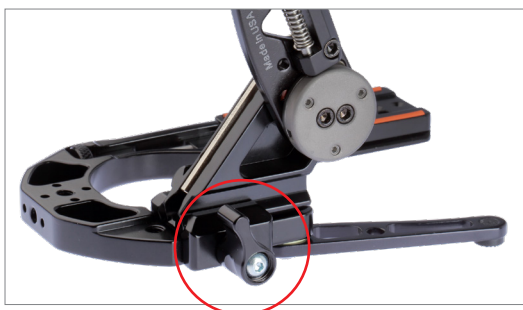

Use the ratcheting knob to loosen and adjust the distance of the arm to the lens, as well as to fold down the bracket for storage. Make sure the Clamp is tight when using the bracket.

## Foldable Kick Stand and Tension Adjustment Screws



The dark grey titanium alloy pivot point on the Boomerang Flash Bracket may need to be adjusted over time. Tighten the 3 outside screws until desired tension is met with allen keys provided.

The Foldable Kick Stand may be extended from beneath the Boomerang to stabilize the camera on flat surfaces and assist from tipping over.

## Features

- Rotate your flash or accessory 90° from Landscape to Portrait positions keeping the flash above your camera.
- Eliminate awkward side shadows
- Reduce / Eliminate red-eye
- Folds flat for storage or travel
- Aircraft Grade Aluminum Construction
- Lightweight, 18 oz. (1.13 lbs.)
- Made in the USA

## Items Included

- BBGv2 Flash Bracket Assembly
- PMG Arca Compatible Bracket Plate
- (1) CS2 Low Profile Cold Shoe
- Allen Key Set
- 5 Year Warranty



#BBGv2 Shown with Profoto B2 on #BLSA 5/8" adapter

## Boomerang Maintenance

Check periodically for loose screws and tighten with the included hardware. The Boomerang Flash Bracket is a precision instrument that should be used only as directed.

## Additional ProMediaGear Items



#BL01  
Universal Battery Harness



#FCMR  
Raiser / Extender



#SS2P1  
Quick Release Strap System



#BLSA  
5/8" Profoto Light Stand Adapter



#HB70  
Handle for Bracket Plates



#BBX  
Boomerang Flash Bracket



**\*\* Custom Bracket Plates \*\***  
Various Brands / Models Available



#C60  
Arca Type Clamp



**\*\* L-Brackets \*\***  
Universal and Custom Available



#GKJr.  
Katana Junior Gimbal



34 Series Pro-Stix  
Carbon Fiber Tripods



#PMG-DUO SLIDER(S)  
VS24 / VS32 / VS36 / VS368 / VS48

## Customer Service

Rev 10/18

### ProMediaGear

708.263.4443 or Toll Free 1.888.413.3332  
info@ProMediaGear.com • www.ProMediaGear.com