


Congratulations on your purchase of our BigBlue product. The BigBlue Diving Light uses carefully selected materials that have met rigorous industry standards. With innovative manufacturing processes, and strict quality controls, we guarantee the reliability of all BigBlue Diving products.

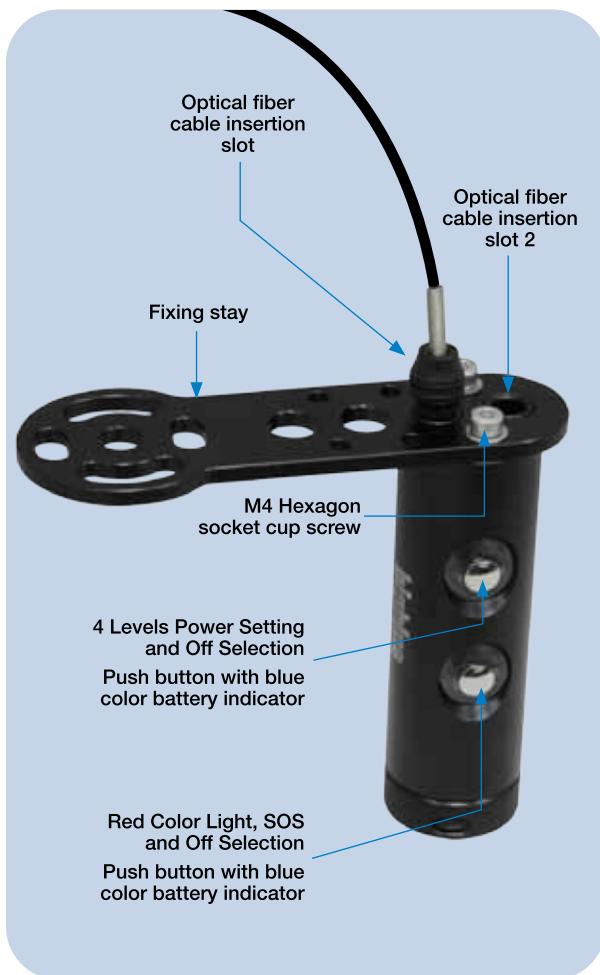

Maintenance and Transportation

- After each dive, always rinse with fresh water. If the diving light and the battery will not be used for a prolonged period of time (more than a month), remove the battery from the light.
- In rare cases of flooding, discontinue use. Turn the light off immediately, disconnect the battery, and rinse with fresh water. Let the component dry completely, and return it to BigBlue for service.
- Flooding damage cannot be repaired on site

Clean the Controller and Lubricate the O-Ring

- For good practice, put the controller into fresh water for few hours after every dive.
- Dry it out and put the silicone grease on the O-Ring. Ready for other dive.

Limited Warranty

1. BigBlue guarantees the proper operation of this product by the original retail purchaser under normal and intended use.
2. This warranty applies only to the original retail purchaser, which does not cover commercial or rental use, and it is not transferable to third parties.
3. If the original retail purchaser detects defect in the materials or workmanship, return the product together with proof of purchase, including the date of purchase to an authorized BigBlue dealer or BigBlue.
4. The warranty covers a period of up to one year from the date of purchase. Warranty for rechargeable battery pack is valid for six months only.
5. This limited warranty is in lieu of all other warranties. No other person or party is authorized to assume for BigBlue any other liability in connection with the sales of this product.
6. This warranty will be voided if the product or any of its parts have been tempered with, repaired, modified, transformed, adapted, or damaged without authorization by BigBlue.
7. This warranty does not cover parts subjected to normal wear and tear, including and is not limited to the following: O-ring, battery pack, front glass (surface scratch or damage on impact).
8. This warranty does not cover damages due to impact, used in chlorinated or polluted waters, and extended exposure to heat sources.

Bossk International Company Limited

Web : www.bigbluelights.com

www.bigblue.com.hk

Email: customerservice@bigblue.com.hk Tel: (852) 3568 0773

MADE IN CHINA Patent Pending

bigblue[®]
THE BRIGHTER IDEA

CONTROLLER

INSTRUCTION MANUAL



Technical Specifications

Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: CR2032 x 2
Burn time	: 100 hrs
Maximum depth	: 100 m tested
Size	: Dia. 30 x L. 98.3mm
Weight in air	: 110g (including battery)
Buoyancy in seawater	: -51g (including battery)
Switching system	: Push button with battery indicator
Lanyard	: Included

Specifications subject to change without prior notice.

Replacing the Battery Pack Inside the body

Unscrew the body and then slide out two CR2032 batteries.



Choosing 4-Levels Power Setting

Press the push button every time to choose the desired output level : I-output at 10%, II-output at 25%, III-output at 50%, IV-output at 100%.

For OFF setting, press the push button one time after 1 sec of level selection or press the push button five times after 4-Levels setting.



Choosing between Red Color Light and SOS

Press the push button every time to choose the desired output level : I- output at Red Color Light, II-output at SOS.

For OFF setting, press the push button one time after 1 sec of level selection or press the push button three times after Red Color Light and SOS.



Battery level indicator built-in

Blue color of LED turn on when pressing the push button. Once blue color of LED doesn't light, please replace the new batteries.



Connecting the optical fiber cables

Insert the connector of each optical fiber cable all the way into the optical fiber cable insertion slot 1 or 2.

Each Controller can control either one or two light models at the same time.

Attaching the fixing stay

Attach the fixing stay by inserting the two provided M4 hexagon socket cap screws into the two threaded holes on the top.

Use the hexagon Socket cap wrench provided with the package.

Secure by tightening together with the grip top.