



EVA1 Z-Finder

The EVA1 Z-Finder is specifically designed to convert the monitor included with the EVA 1 to an optical viewfinder. The Z-Finder comes with a flip up frame designed to slide onto the EVA1 LCD and lock securely in place. The Z-Finder can pop on and off the frame for quick shooting.

This Z-finder will magnify the LCD screen by 2x and has a diopter for fine focus tuning. It cuts out any extraneous light helpful for outdoor shooting and offers an initial point of stability by pressing your eye against the large eyecup. The EVA1 Z-finder comes with a 40mm diameter Zacuto designed optic, anti-fog coated protective lens, and the mounting system designed specifically for the EVA1 LCD.



Check out our tutorial videos at zacuto.com

Parts and Features

x1 Z-Finder Pro

x1 Focus Ring

x1 Eyecup & Lens Door

x2 Extender Frames

x2 Anti-Fog Shield

x1 EVA1 Z-Finder Mounting Frame

x1 Bracket Pin Hole

x1 Bracket Screw Hole

x1 Screen Latch

x1 EVA1 Z-Finder Rod Adapter

x2 Tightening Lever


x2 Rod Ports

Assembling EVA1 Z-Finder


1 Orient EVA1 LCD as shown in picture.

2 Slide EVA1 rod adapter into LCD rod hole and tighten knob.

3 Snap the Z-Finder Pro to the EVA1 Frame

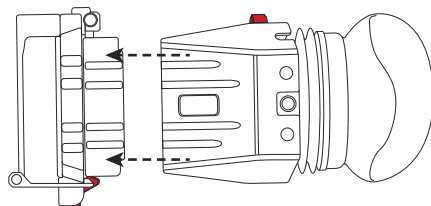


To flip up the Z-Finder, use red latch at the bottom of the Z-Finder Frame



4 Slide LCD and EVA1 rod adapter into Z-Finder and tighten red knob.


5 Secure LCD by closing the black latch on the bottom of the Z-Finder frame.

6 Mount EVA1 Z-Finder onto rod as shown in picture and tighten red levers.

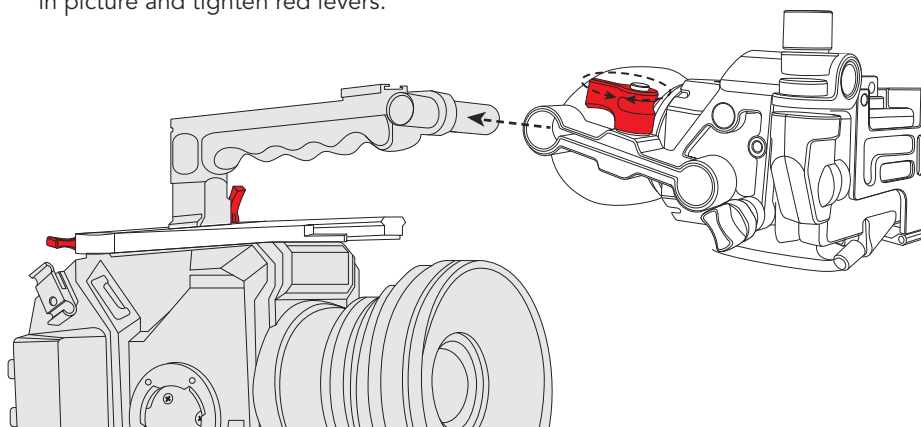

Assembling Z-Finder with EVA1 Rod Stud for Shoulder Rig

- 1 To use for a shoulder mounted configuration, screw the EVA1 Rod Stud into the camera handle's front 1/4"-20 hole as shown below.

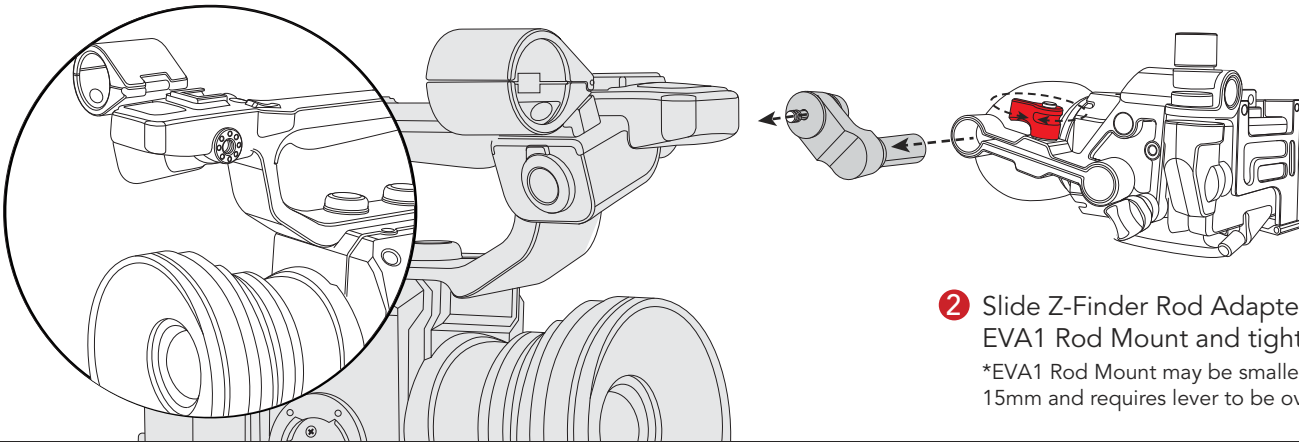


- 2 Slide Z-Finder Rod Adapter onto the EVA1 Rod Mount and tighten lever

*EVA1 Rod Mount may be smaller than 15mm and requires lever to be overtightened.

Assembling Z-Finder with EVA1 Rod Stud for Tripod

- 1 To use for a tripod mounted configuration, screw the EVA1 Rod Stud into the camera handle's rear 1/4"-20 hole as shown below.

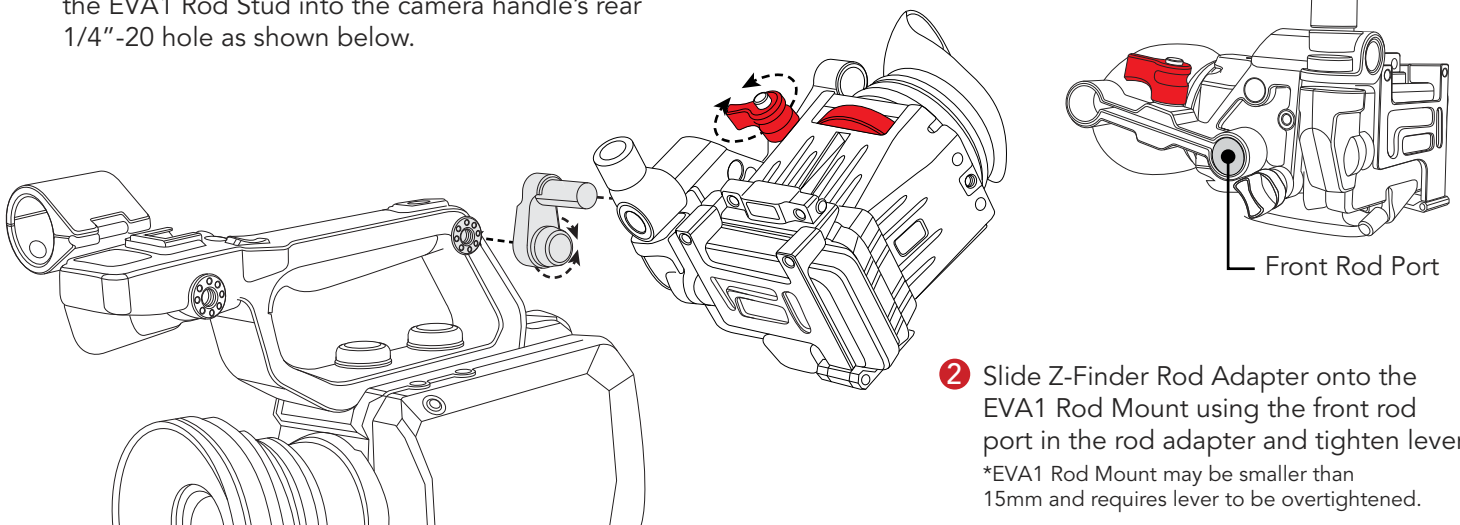


- 2 Slide Z-Finder Rod Adapter onto the EVA1 Rod Mount using the front rod port in the rod adapter and tighten lever

*EVA1 Rod Mount may be smaller than 15mm and requires lever to be overtightened.


Operating EVA1 Z-Finder

If you're unable to focus using the red focus ring, then use the provided extender frames as shown. When using the diopter wheel for fine focus tuning use letters in menu screen.

For additional focus range insert drop in diopters as shown below. To insert Lvl 2 Anti-Fog Shield see diagram below. (+4 through -1 Diopters are sold separately.)

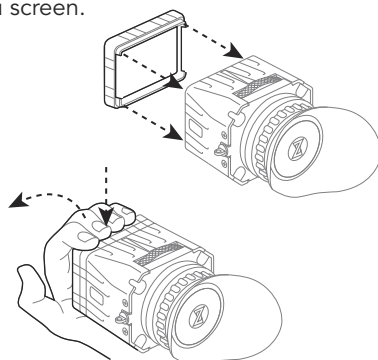

To remove extender frames, press down in middle and pull away

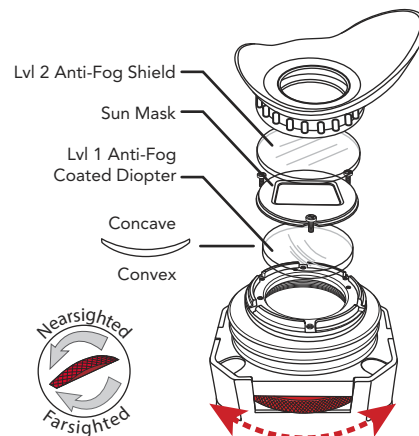

- 1 Loosen screws and rotate sun mask until all three notches align with screws.
- 2 Remove sun mask by lifting up and insert your desired diopter, convex side down.
- 3 Place sun mask back on top of diopter. Rotate sun mask to original position and tighten screws.

